




XGA	4,500 ANSI	3,000,000:1	XGA	5,000 ANSI	3,000,000:1	WUXGA	4,500 ANSI	3,000,000:1
-----	------------	-------------	-----	------------	-------------	-------	------------	-------------

30,000시간
10년 이상 사용

Spec.

모델명	SX145 (HLD145X)	SX150 (HLD150X)	SU145 (HLD145U)
Optical Spec.			
밝기(ANSI)	4500	5000	4500
Display Technology	3LCD		
명암비(Contract Ratio)	3,000,000:1 (Bright mode)		
해상도(Resolution)	XGA (1024x768)		WUXGA (1920 X 1200)
Light Source	HLD LASER		
Light Source Time	30,000H		
Aspect Ratio	4:3		16:10
Projection Lens			
Zoom/Focus	Manual		
Zoom Ratio	1.2x optics		
Throw Ratio	1.48~1.78 : 1 (70"@2.104m)		1.26~2.09 : 1 (70"@1.904m)
F	F:1.6~1.76		
f	f=19.158~23.018mm		
Screen Size	0.888~10.937m (30"~300")		0.872~10.736m (30"~300")
Generic Spec.			
Speaker	1*16W		
Scanning Frequency	Hsync Frequency 15~91KHz / Vsync Frequency 24~85Hz		
Computer Signal Input	PC, VGA, SVGA, XGA, SXGA, WXGA, UXGA, WUXGA, Mac		
Video Compatibility	PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, 480i, 480p, 576i, 576p, 720p, 1080p and 1080i		
Power Consumption	420W		490W
ECO Standby Mode	<0.5W		
Network standby	<2W		
Keystone Correction	V: ±30°(auto+manual), H: ±15°(manual), Pincushion/Barrel Correction, Corner Keystone		V: ±30°(auto+manual), H: ±15°(manual), Corner Keystone
OSD(Languages)	26 languages: English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portugese, Japanese, Simplified Chinese, Traditional Chinese, Korea, Russian, Arabic, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi		
Input Terminals	VGA x2; Audio in(mini jack 3.5mm)x1; Video x1 Audio in(L/R)--RCAX2; HDMI x2; USB-Ax1,		
Output Terminals	VGA x1, Audio out (mini-jack,3.5mm) x1		
Other Terminals	RS-232x1, RJ45 x1(for control), USB-Bx1(for up-grade)		
Mechanical Spec.			
Power Requirement	AC 100 – 240 V ... 50-60 Hz		
Net. Weight(KG)	4.9kg		
Max Dimensions	365(W) x 290(D) x 105(H) mm		
Accessories			
Standard	Power cord, VGA cable, Remote control		

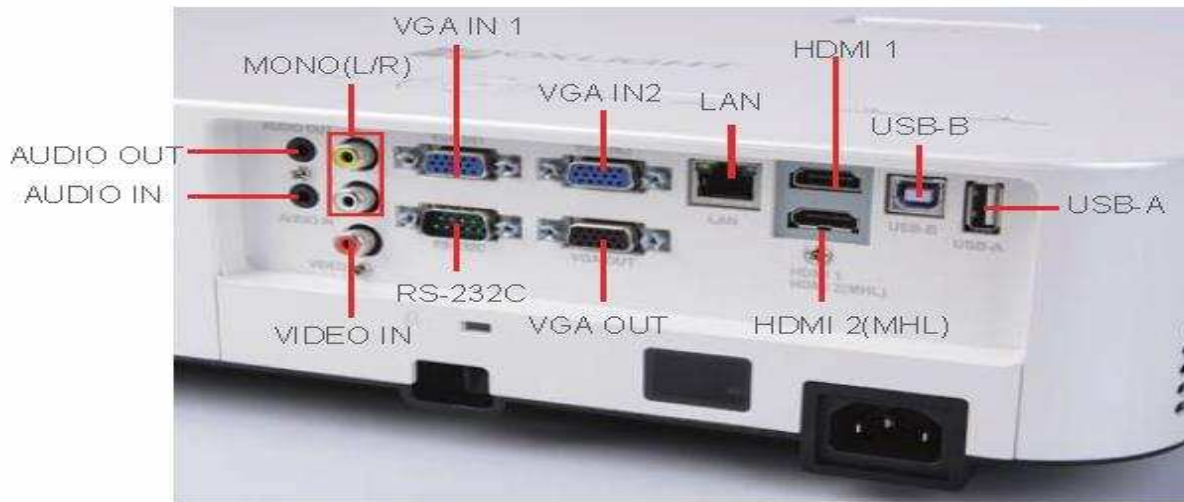

투사거리표

모델명	투사화면크기	XGA (4:3)		모델명	투사화면크기	WUXGA (16:10)	
	인치	투사거리/단위, m	높이위치		인치	투사거리/단위, m	높이위치
SX145 (HLD145X)	30	0.88~1.07	0.095	SU145 (HLD145U)	30	0.87~1.05	0.029
	40	1.19~1.43	0.087		40	1.17~1.41	0.038
	60	1.80~2.16	0.131		60	1.76~2.12	0.058
	70	2.10~2.53	0.152		70	2.06~2.48	0.067
	80	2.40~2.89	0.174		80	2.36~2.84	0.077
	90	2.71~3.26	0.198		90	2.66~3.20	0.087
	100	3.01~3.62	0.218		100	2.96~3.56	0.096
	120	3.62~4.35	0.261		120	3.55~4.28	0.115
	150	4.53~5.45	0.327		150	4.45~5.35	0.144
	200	6.05~7.28	0.435		200	5.94~7.14	0.192
SX150 (HLD150X)	250	7.57~9.11	0.544	250	7.44~8.94	0.240	
	300	9.09~10.93	0.653	300	8.93~10.73	0.288	